


Let's discover Valeo Range

How to select the right Valeo TM compressor ?

1/ Choose your Mounting

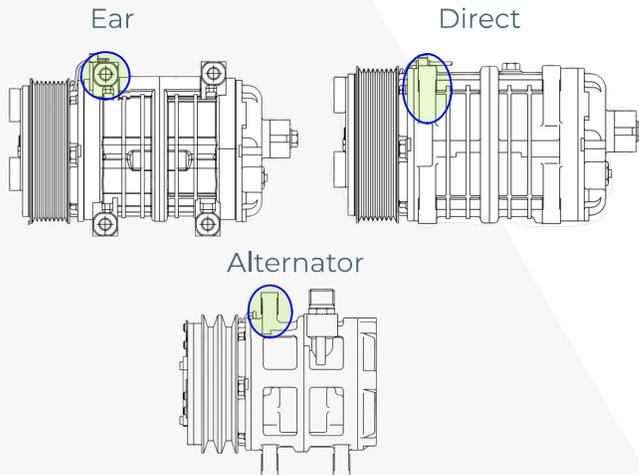

2/ Choose your Oil

- **ZXL100PG** (PAG46) for R134a
- **VC100YF** (PAG46) for R134a/R1234yf
- **SEZ68** (POE68) for R404a/R452a
- **No oil*** means that the compressor is pre-charged with residual quantity of mineral oil.

**Customer is responsible to fill it with the suitable oil for R1234yf, R134a, R404a and R452a usage.*


3/ Choose your Magnetic clutch

Voltage: 12V or 24V


Coil: : 1 or 2 wires

Armature plate: 3-eye rubber dumper (3E) or Leaf Spring (LS)


Standard

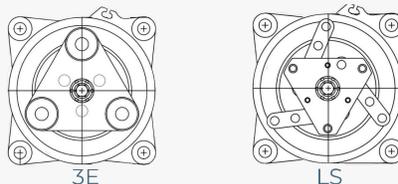

Option




Pulley groove:

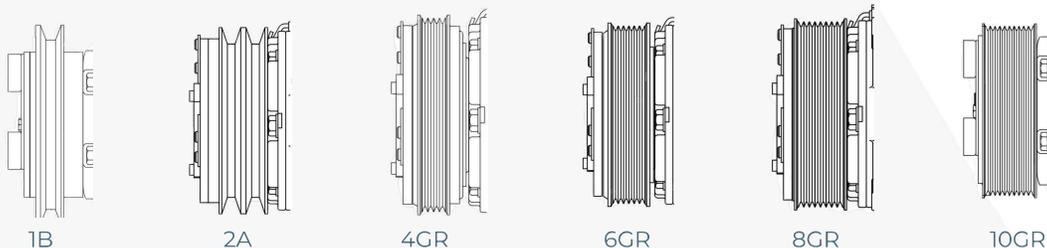


4/ Choose your Fitting

Monolithic




No fitting

PAD



Horizontal


O'ring: $\frac{3}{4} \times \frac{7}{8}$
Tube "o": 1 x 14



Bolt-on

Vertical

O'ring: $\frac{3}{4} \times \frac{7}{8}$
Tube "o": 1 x 14



Vertical Inverted

